

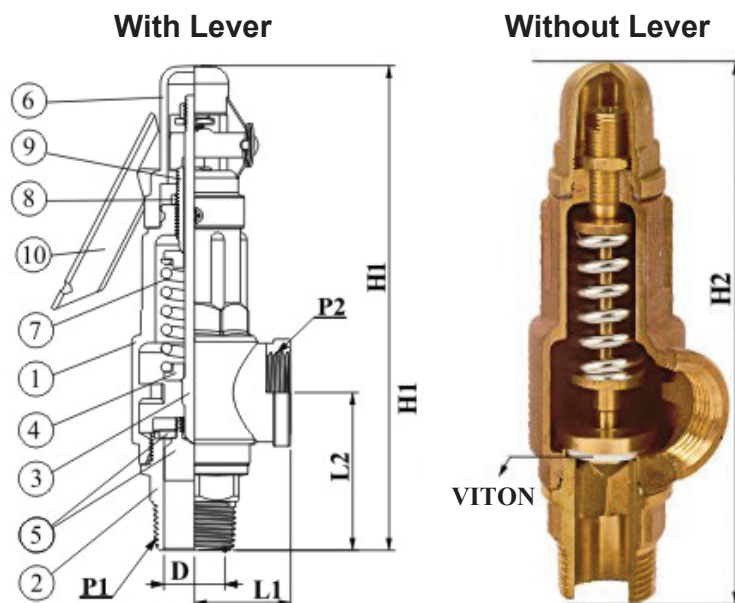


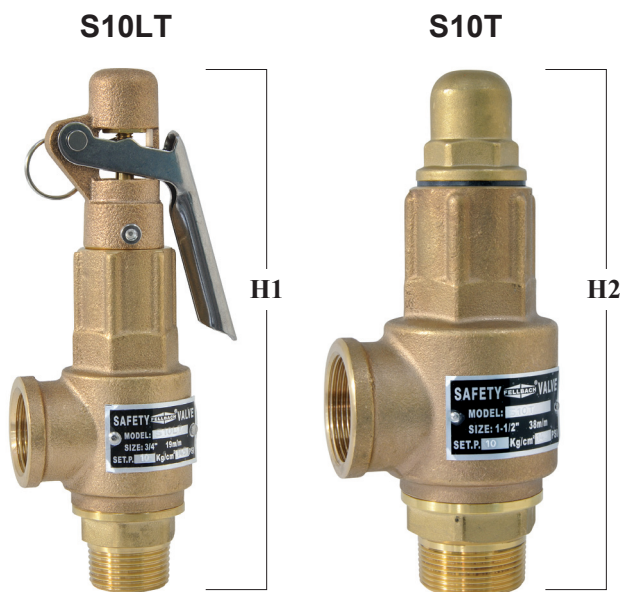

General Application

- Medium Fluid : Non-Corrosive Gas, Air, Steam, Water & Oil.
- Working Temp. : -20°C ~ +180°C
- Working Pressure : 3 ~ 10 Bar
- DISC : Brass + Viton
- Thread End: : BSPT (BS21)



Material List

No.	Name	S10LT with lever	S10T without lever
1	VALVE BODY	BRONZE	BRONZE
2	VALVE SEAT	BRASS	BRASS
3	SPINDLE	BRASS	BRASS
4	SPRING SEAT	BRASS	BRASS
5	DISC	BRASS + VITON	BRASS + VITON
6	CAP	BRONZE	BRASS
7	SPRING	SS-304	SS-304
8	NUT	BRASS	BRASS
9	ADJUST SCREW	BRASS	BRASS
10	HANDLE	STEEL	-
Working Pressure		Customer Determine	
Working Temperature		-20°C ~ +180°C	

Unit: mm

Dimension							
SIZE P1 x P2	D ORIFICE	LIFT	L1	L2	H1 lever	H2 without lever	PRESSURE RANGE
½ x ½	13	0.52	31	48	158	137	4 - 10 Bar
¾ x ¾	19	0.76	35	55	167	145	4 - 13 Bar
1 x 1	25	1	40	65	199	175	4.5 - 13 Bar
1¼ x 1¼	32	1.28	51	75	222	198	3 - 12 Bar
1½ x 1½	38	1.52	59	86	247	225	3.5 - 10 Bar
2 x 2	50	2	67	100	284	256	3 - 10 Bar

Remark: Other pressure ranges on request.
When placing order, please indicate working pressure.