


Diaphragm Valve For Abrasive or Corrosive Slurry, Powder & Particles

DESIGN FEATURES

- Flange End to EN-1092-1 PN10/16
- Diaphragm Made of Soft Material
- No Metal Parts Directly Contacting with the Slurry
- Stable Performance and Long Service Life
- Absolute Zero Downstream Leakage


APPLICATION

- Applied to the Control on Transportation of Slurry with Acid-base Corrosive and Environmental Protection Industry.

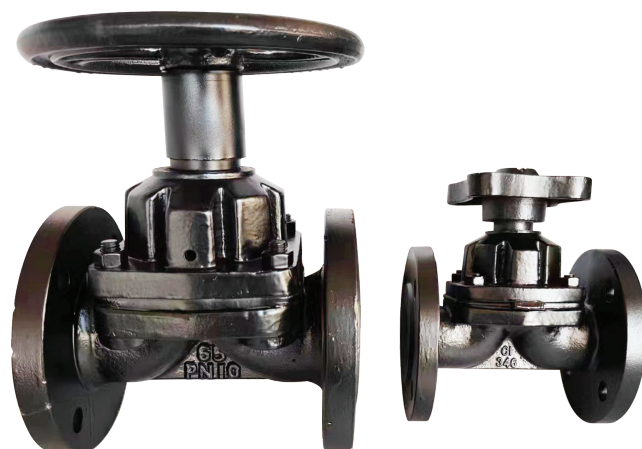


TECHNICAL FEATURES


Body	: Cast Iron (WCB) with Butyl Rubber Linings
Medium	: Abrasive or Corrosive Slurry, Powder and Particles
Working Pressure	: Refer to Valve Size Datasheet
Temperature	: 5 ~ 66°C
Flange	: DN20 ~ DN200 (PN16) ▪ DN250 ~ DN350 (PN10)



Flange DN20 ~ DN50

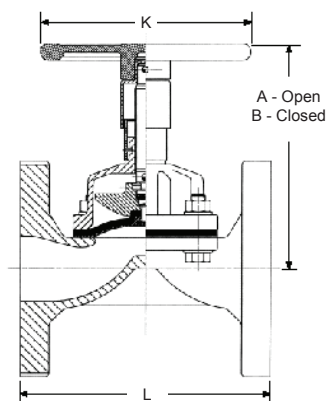

Flange DN65 ~ DN150

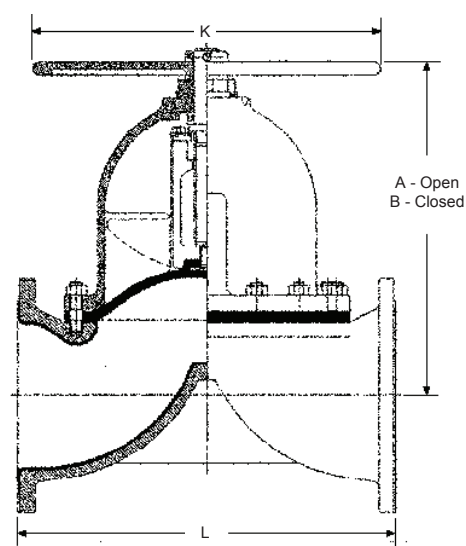

Flange DN200 ~ DN350

Unit : mm

VALVE SIZE - DN															
Flange	(DN)	20	25	32	40	50	65	80	100	125	150	200	250	300	350
	A	103	112	144	156	177	213	273	320	386	453	626	734	776	883
	B	93	100	127	136	151	183	198	266	310	380	506	598	698	723
	L	120	129	149	164	192	218	256	308	358	406	525	645	780	
Knob	(KG)	3	4	6.5	7.5	10	16	23.5	34	44	67.5	141.5	229	321	360
	K	75	85	100	110	125	145	160	180	210	240	295	350	400	460
Working Pressure - Bar		10	10	10	10	10	10	10	10	10	10	6	6	4	4