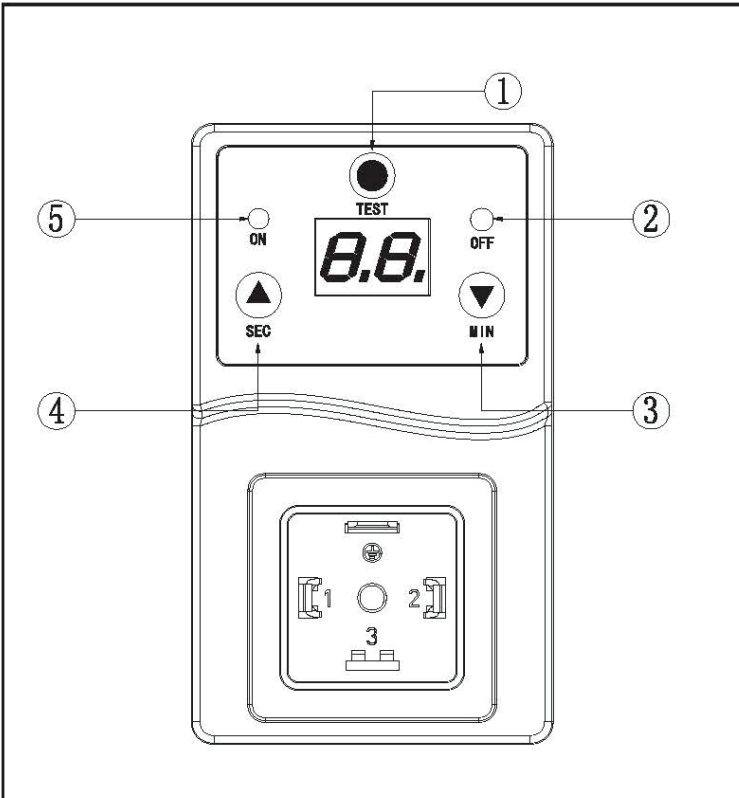


Digital Timer

Product Introduction

Panel introduction

		No	Description
		①	Test key
		②	Off indicator
		③	Min/up key
		④	Sec/down key
		⑤	On indicator


Specification

Item no		XY-790H	XY-790L
Input	Voltage	110~240V AC/DC	7~36V AC/DC
	Power	10mA MAX	20mA MAX
Output	Form	MOS output	relay output
	Model	Close first ,then open	
	Current	1.5A MAX	
Display	Basic display	2 digitaltube show the time value, 2 LED indicator	
	Stauts display	Digital tube countdown ,decimal point flashes every seconds	
	Adjust mode	The corresponding status indicator flashes when changing data	
Time setting	On	0.1~99 sec	
	Off	0.5~99 min	
Protection class		IP65	
Connection		DIN43650A	
Insulation voltage		1000VAC 1min	
Insulation resistance		50MΩ(500V DC)	
Impact resistance		MAX 100m/s ² each 3 axis and 6 direction for 3 times	
Ambient temperature		Working :-10~70℃, storage:-20~80℃	
Ambient humidity		35~90% RH	

Digital Timer


Operating Instruction

■ Main cycle

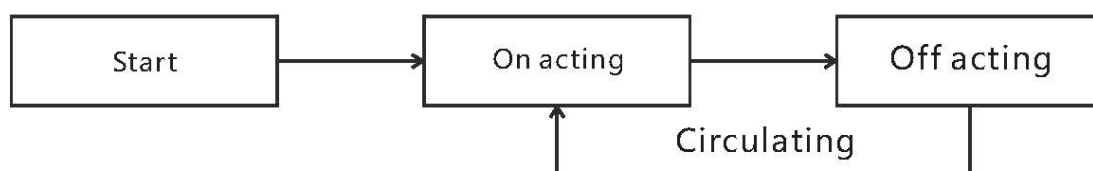


■ Setting

1.On(sec) time setting

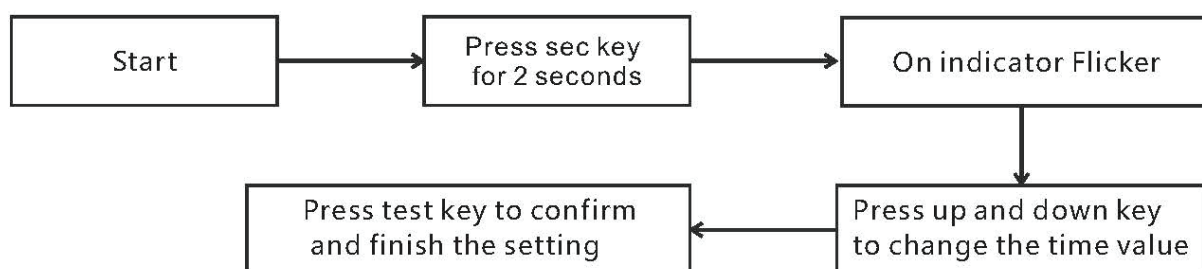

2.Off(min) time setting

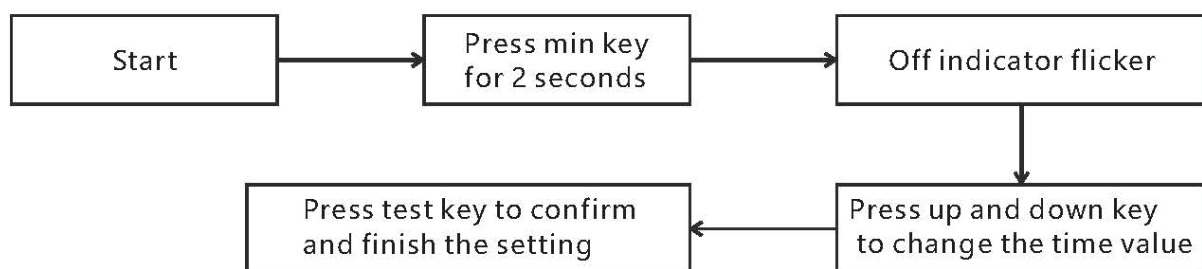

3.Reset setting



fenghua xingyu electron co.,ltd.
 no.2 , hengfeng road, fangqiao industry zone,ningbo, china 315514
www.xingyu-solenoid.com www.xyelectron.com www.nbrfs.com